

# SC202 Sound level meter class 2 and spectrum analyser\* (1/1 and 1/3 oct)

## TECHNICAL SPECIFICATIONS

D\_SC202\_v0006\_20211112\_EN

\*Optional  
+ In preparation

The SC202 is a class 2 sound level meter expandable to octave band and third octave band spectrum analyser\* that measures all parameters simultaneously with all frequency and time weightings in different time bases without configuration.

Its colour touch screen allows you to easily scroll through all the screens and display and configure in real time the different analyses carried out by the sound level meter during the measurement.

The SC202 stores the registers in memory in csv format, so they can be opened from different operating system such Microsoft Windows®, Mac OS® or LINUX®. These csv files can be exported to CESVA *Lab* application.

The SC202 has a USB-C connector to power the equipment, transfer the data to the computer and communicate using the real-time protocol.

Because of the Bluetooth communication, the SC202 is ready to be managed from the mobile or the Tablet through the *SC202 Link*\* App. In addition the WIFI communication allows the sound level meter to be updated online to the latest version, instant activate a purchased module or upload the measurements made to CESVACloud server\* so the measurements will be available from anywhere.



## APPLICATIONS

- Noise at Work (DIRECTIVE 2003/10/EC)
- PPE hearing protection selection (SNR, HML and octave\*)
- Evaluation of room background noise (NC & NR curves)\*
- Motor vehicle noise inspection
- Control of the music level in concerts
- Noise assessment of HVAC systems
- Determination of sound power and sound level emitted by machinery
- Industrial noise analysis of machinery (product development, quality control and maintenance)
- Control of noise emitted by warning and alarm systems
- Check (class 2) of environmental noise (ISO 1996-2): tonality\*, impulsivity and low frequency content


## CHARACTERISTICS

- Capacitive colour touch screen
- Single measuring range 25,5 dBA -140,0 dBC peak
- Class 2 according to IEC 61672-1
- Sound level meter expandable to 1/3 octave band through *FR202*\* module
- Backerase of the last 10 seconds
- NC/NR curves
- Bluetooth BLE ready for the Wireless communication through Apps\* for mobile or Tablet (Android)
- WIFI communication prepared to sent data to the Cloud.
- Built-in memory and files in CSV format
- Compatible files to CESVA *Lab* software
- Pattern approval certificate for Spain

# SC202 Sound level meter class 2 and spectrum analyser\* (1/1 and 1/3 oct)

\*Optional  
+ In preparation

## MAIN CHARACTERISTICS



### COLOUR TOUCH SCREEN

The SC202 has a colour touch screen to manage the complete equipment.


Its capacitive screen is 3,5" size, it helps to any action will be very fast and intuitive.

The screen of the SC202 shows a clear and sharp view even in broad daylight; it also lights up automatically when the sound level meter is turned on.



### SINGLE MEASURING RANGE

The SC202 has a single measurement range, from 25,5 dBA to 140,0 dBC peak. This fact saves time since it is not necessary to configure the equipment previously. It also avoids having to repeat measurements due to measuring out range.



### SOUND LEVEL METER EXPANDABLE TO 1/3 OCTAVE

The SC202 is expandable through *FR202\** module, this activates the spectral analysis by octave band (1/1) and third octave band (1/3).

Performing frequency analysis increases the applications that can be evaluated with the SC202, such as checking tonal components, low frequency or acoustic absorption of materials.



### WIRELESS SOUND LEVEL METER : BLUETOOTH / WIFI

The SC202 has internal *Bluetooth®* communication to connect it to a device (Tablet, mobile,...) and thus to be able to operate the SC202 remotely using the *SC202 Link\** App from **CESVA**.

The WIFI communication of the SC202 allows to send the memories to the *CESVACloud\** server this means to have the memories immediately from anywhere. It also allows to update the firmware version and activate the modules purchased, only by connecting the sound level meter to internet.



### BUILT-IN MEMORY WITH CSV FILES

The SC202 has internal memory to store the recordings made and final results. In addition to the history of date and time changes, sensitivity adjustment and firmware version. These data are saved in csv files and can be opened from different operating systems as Microsoft Windows®, Mac OS® or LINUX®. The SC202 csv files are compatible with the *CESVA Lab* application.



### NC/NR CURVES AND BACKERASE

The SC202 evaluates the spectrum according the NC (Noise Criterion) and NR (Noise Reduction) curves families, this feature allows the equipment to carry out the evaluation of background noise in rooms.

With the BACKERASE option, allows the SC202 to eliminate unwanted audible events corresponding to the last 10 seconds before a pause.

## TECHNICAL SPECIFICATIONS

### CERTIFICATIONS AND STANDARDS

- IEC 61672-1:2013 class 2, EN 61672-1:2013 class 2
- IEC 61260-1:2014 class 2, EN 61260-1:2014 class 2
- ANSI S1.4:2014/ Part1 type 2, ANSI S1.43:97 (R2007) type 2, ANSI S1.11:04 type 2
- DIN 45657:2014 regarding the Taktmaximalpegel function
- IEC 61010-1:2010/A1:2016/COR1:2019 II pollution degree
- **CE** Marking. Complies with 2014/35/UE and EMC 2014/30/UE low tension regulation.
- Pattern approval certificate for Spain.

### MICROPHONE

#### MODEL P008:

|                      |                           |
|----------------------|---------------------------|
| TYPE:                | 1/2" condenser microphone |
| POLARIZATION:        | pre-polarized             |
| NOMINAL SENSITIVITY: | 16,0 mV/Pa                |
| PREAMPLIFIER:        | incorporated              |

### MEASUREMENT RANGES

#### MEASUREMENT RANGE for LF, LS, LI, Lt and LT functions from typical noise to maximum level:

|       | Weigh. A(dB) | Weigh. C(dB) | Weigh. Z(dB) |
|-------|--------------|--------------|--------------|
| P008: | 25,5-137,0   | 29,1-137,0   | 33,3-137,0   |

#### LINEAR RANGE for LF, LS, LI, Lt and LT functions:

|       | Weigh. A(dB) | Weigh. C(dB) | Weigh. Z(dB) |
|-------|--------------|--------------|--------------|
| P008: | 30,5-137,0   | 34,1-137,0   | 38,3-137,0   |

#### RANGE for LCpeak function:

|       | Weigh. C(dB) |
|-------|--------------|
| P008: | 55,0-140,0   |

### NOISE

#### P008:

|                | Weigh. A(dB) | Weigh. C(dB) | Weigh. Z(dB) |
|----------------|--------------|--------------|--------------|
| ELECTRIC:      | 12,7         | 12,5         | 17,7         |
| TOTAL AT 20°C: | 25,5         | 29,1         | 33,3         |

### FREQUENCY and TIME WEIGHTING

|                               |            |
|-------------------------------|------------|
| CLASS ACCORDING TO IEC 61672: | class 2    |
| FREQUENCY WEIGHTING:          | A, C and Z |
| TIME WEIGHTING:               | F, S and I |

### FUNCTIONS

AVAILABLE FUNCTIONS: see functions section

|            |        |
|------------|--------|
| RESOLUTION | 0,1 dB |
|------------|--------|

### PEAK DETECTOR

|                       |         |
|-----------------------|---------|
| ON SET TIME CONSTANT: | < 75 µs |
|-----------------------|---------|

### 1/1 and 1/3 OCTAVE BAND FILTERS (Optional)

#### Class 2 according to IEC 61260

|                       |                       |
|-----------------------|-----------------------|
| Octave band           | from 8 to 16.000 Hz   |
| One-third octave band | from 6,3 to 20.000 Hz |

### ENVIRONMENTAL CRITERIA

#### STATIC PRESSURE INFLUENCE:

|                                      |        |
|--------------------------------------|--------|
| OPERATING RANGE MAXIMUM ERROR        |        |
| from 65 to < 85 kPa (up to 3.500 m): | 1,6 dB |
| from 85 to 108 kPa (up to 2.000 m):  | 0,7 dB |

#### TEMPERATURE INFLUENCE:

|                               |        |
|-------------------------------|--------|
| OPERATING RANGE MAXIMUM ERROR |        |
| from -10 to +50 °C:           | 1,0 dB |

#### HUMIDITY INFLUENCE:

|  |        |
|--|--------|
| OPERATING RANGE MAXIMUM ERROR                      |        |
| (at 40°C and 1 kHz in the absence of condensation) |        |
| from 25 to 90 %:                                   | 1,0 dB |

### INPUTS AND OUTPUTS

#### USB COMMUNICATION

|                   |   |
|-------------------|---|
| TYPE              | Digital according to USB rev. 2.0. full-speed |
| CONNECTOR:        | USB type C                                    |
| CONNECTION CABLE: | CN500 of 0,5 m long                           |

#### WIRELESS COMMUNICATION:

|                     |                     |
|---------------------|---------------------|
| TYPE:               | Bluetooth® v4.2 BLE |
| RANGE (free space): | 50 m                |
| TYPE:               | WIFI (2,4 GHz)      |

#### AC OUTPUT:

|            |                            |
|------------|----------------------------|
| CONNECTOR: | Mini Jack female (Ø 3,5mm) |
|------------|----------------------------|

### POWER

#### BATTERIES:

|       |   |
|-------|---|
| TYPE: | 3 alkaline batteries 1,5 V AA(LR6) size     |
|       | 3 lithium batteries 1,5 V AA(LR6) size      |
|       | 3 rechargeable batteries 1,2 V AA size NiMH |

#### TYPICAL DURATION:

|                        |             |
|------------------------|-------------|
| Alkaline               | 11:00 hours |
| Lithium                | 21:00 hours |
| Rechargeable (2650mAh) | 12:00 hours |

#### EXTERNAL POWER:

|   |            |
|---|------------|
| VOLTAGE INPUT RANGE:  | 5 VDC ± 5% |
| MINIMUM CURRENT:  | 1 A        |
| To feed the SC250 from alternate public current, the use of AM300 mains feeder and CN500 cable are recommended. |            |


### DIMENSIONS AND WEIGHT

|             |                         |
|-------------|-------------------------|
| DIMENSIONS: | 296 x 85 x 26,5 mm      |
| WEIGHT:     | with batteries 358 g    |
|             | without batteries 288 g |

The characteristics, technical specifications and accessories may be altered without prior notice

## SCREENS


SLM

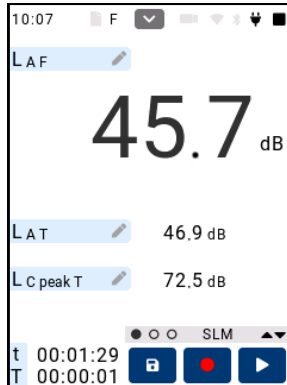

Numeric




1/1 ANALYSER\*

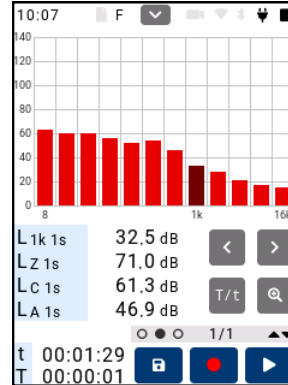

Graphic




1/3 ANALYSER\*

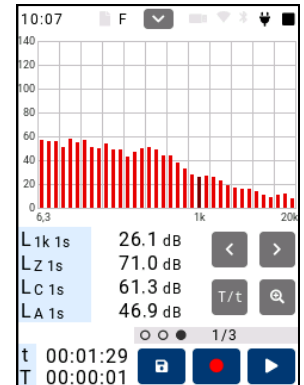


Graphic


\* Optional screens available on FR202 module

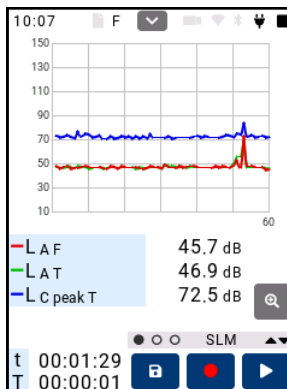

Graphic

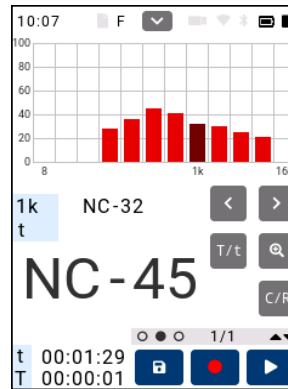

Curves

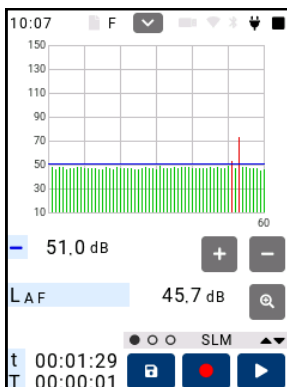

Pass / Fail

The SC202 simultaneously measures all functions of sound level meter, spectrum analyser\* in octave bands and 1/3 octave bands, for integration times of t, T, t1, t2, 1 second and 20 milliseconds\*.

By simply scrolling through the screens the SC202 displays the global sound pressure level (instantaneous and averaged values), the equivalent continuous sound pressure level in real time by octave bands (from 8 Hz to 16 kHz) and 1/3 octave bands (from 6,3 Hz to 20 kHz), as well as statistical data, maximum and minimum values and percentiles. Also the evaluation of the background noise of rooms with NC (Noise Criterion) and NR (Noise Reduction) curves.

On graphical screens, you can zoom in to see the differences and similarities between levels in greater detail.

During the measurement in addition to selecting the parameters displayed on the screen and the time base, the evaluation threshold can be modified on the Pass / Fail screen.

# SC202 Sound level meter class 2 and spectrum analyser\* (1/1 and 1/3 oct)

\*Optional

## FUNCTIONS

|     |  |
|-----|--|
| SLM | $L_{AF}$ , $L_{CF}$ , $L_{AFmaxY}$ , $L_{CFmaxY}$ , $L_{AFminY}$ , $L_{CFminY}$ , $L_{AS}$ , $L_{ASmaxY}$ , $L_{ASminY}$ , $L_{AI}$ , $L_{AImaxY}$ , $L_{AIminY}$ , $L_{CpeakT}$ , $L_{Cpeak1s}^+$ , $L_{nT}$ , $L_{nT}$ , $L_{XT}$ , $L_{XTmaxT}$ , $L_{XTminT}$ , $L_{X1s}$ , $L_{AIY}$ , $L_{AT}$ , $L_{ATmaxT}$ , $L_{ATmax}$ , $L_{ATminT}$ , $L_{ATmin}$ , $L_{CT}$ , $L_{CTmaxT}$ , $L_{CTmax}$ , $L_{CTminT}$ , $L_{CTmin}$ , $L_{AF5t}$ , $L_{AF5T}$ , $L_{AF51s}^+$ , $L_{AF20ms}^+$ , $L_{A20ms}^+$ |
|-----|--|

<sup>+</sup> Not shown on the screen

|              |   |                   |
|--------------|---|-------------------|
| 1/1 ANALYSER | $L_{ft}$ , $L_{fT}$ , $L_{f1s}$ , NC, NC <sub>f</sub> , NR, NR <sub>f</sub> | f: 8 Hz to 16 kHz |
|--------------|---|-------------------|

|              |                                 |                     |
|--------------|---------------------------------|---------------------|
| 1/3 ANALYSER | $L_{ft}$ , $L_{fT}$ , $L_{f1s}$ | f: 6,3 Hz to 20 kHz |
|--------------|---------------------------------|---------------------|

t: Measuring time

T: Integration time

t<sub>1</sub>, t<sub>2</sub>: Sliding integration time

X: Frequency weighting A, C and Z

Y: t, T and 1 second integration time

n: 1%, 5%, 10%, 50%, 90%, 95% and 99%

## INCLUDED ACCESSORIES

|       |  |
|-------|--|
| CN500 | PC (USB type C – USB) connection cable |
| PV009 | Wind screen                            |
| FN004 | Soft case                              |
|       | 3 1,5 V batteries                      |

## OPTIONAL ACCESSORIES

|       |   |
|-------|---|
| CB004 | Class 2 sound calibrator                |
| CB012 | Class 2 sound calibrator                |
| TR040 | 1,10 m tripod                           |
| TR050 | 1,50 m tripod                           |
| ML043 | Transport briefcase (48x37x16 cm)       |
| ML013 | Transport briefcase (39x32x12 cm)       |
| ML063 | Special outdoor briefcase (51x38x15 cm) |
| AM300 | Mains feeder (V= 100/240 V, 50/60 Hz)   |
| CN105 | Microphone extension cable 5 m          |
| CN110 | Microphone extension cable 10 m         |
| TR002 | Tripod adapter                          |
| PR003 | Extension rod 3 m                       |

## OPTIONAL MODULES

|       |   |
|-------|---|
| FR202 | Spectrum analyser by octave band to 8 Hz to 16 kHz, NC and NR curves and spectrum analyser by 1/3 octave band to 6,3 Hz to 20 kHz module. |
|-------|---|

**CESVA**

**amberg**<sup>®</sup>  
instruments for life

www.ambergo.pt | info@ambergo.pt | +351 253 200 620